

# Drying of herbs and spices

**Dr. Sturm, Barbara, von Gersdorff, Gardis**

Affiliation: University of Kassel, Department of Agricultural and  
Biosystems Engineering

Witzenhausen (Germany)

[barbara.sturm@uni-kassel.de](mailto:barbara.sturm@uni-kassel.de)

- General aims and challenges of dehydration
- Quality parameters for dried herbs
- Aims in herb drying
- Influencing factors on herb quality
- Further influencing factors

This module should give the user a deeper understanding of the **drying process of herbs** and highlights the **influencing factors** on high **product quality** and **efficient processing**

# General aims of dehydration

- **Reduction** of moisture content
  - **Reduction** of chemical and biological activity
  - **Shelf life** extension
  - **Prevention** of dry matter losses
  - **Easy and cheap** handling of products
  - **Maintain** nutritional, biological and technical properties of the product
- ⇒ Dehydration of food is responsible for **15-25 %** of the industrial energy consumption at **low energy efficiencies** (35-45%) and often unsatisfactory product quality

# Excursion moisture content

Wet basis moisture content ( $MC_{wb}$ , also known as W) is most common for farmers and producers and is defined as:

$$MC_{wb} = \frac{\text{weight of water}}{\text{weight of dry matter} + \text{weight of water}} \cdot 100$$

Herbs and spices are stable at **10 %**  $MC_{wb}$

# Excursion: Moisture content

Dry basis moisture content ( $MC_{db}$ , also known as X) is most common for scientists and is defined as

$$MC_{db} = \frac{\text{weight of water}}{\text{weight of dry matter}} \cdot 100$$

It is converted as follows:

$$MC_{wb} = \frac{MC_{db}}{100 + MC_{db}} \cdot 100 \quad \text{or} \quad MC_{db} = \frac{MC_{wb}}{100 - MC_{wb}} \cdot 100$$

# Challenges during the drying process

## ⇒ Vitamin degradation

- Most of the vitamins are not stable heat stable or are reduced by enzymatic oxidation

## ⇒ Changes in structure, texture, colour, flavour, taste

- Protein denaturation
- Protein/Lipid oxidation
- Loss of essential oils

## ⇒ Often not fully reconstitutionable

- Complete rehumidification is not possible; less water than being lost during drying can be absorbed

## Initial Situation (Mujumdar, 2007)

- ⇒ Out of date technical devices
- ⇒ Unnecessarily long drying times
- ⇒ Increased energy demand
- ⇒ Dependency on oil and gas prices
- ⇒ Need of customisation
- ⇒ Product temperature usually is unknown

## Goals

- ⇒ Targeted control of process
- ⇒ Technically easily implementable solutions (upgrade of devices)
- ⇒ Increased capacity or smaller devices
- ⇒ Flexibility in production
- ⇒ Reduction of energy costs and demands



## Process Analysis and Optimisation

- ⇒ Thermodynamics
- ⇒ Product quality
- ⇒ Unit operation or part of whole process

## Process Control (air temperature, velocity and rel. humidity)

- ⇒ Single stage
  - ⇒ Multi stage, time controlled (Chua et al., 2000)
  - ⇒ Multi stage, based on optical analysis (Martynenko, 2008)
- Measured values have to be used to feedback to the system, e.g. adaption of process parameters
    - ⇒ At every point of the drying process, the relation between **air temperature, velocity** and **relative** humidity should be balanced

# Quality parameters for dried herbs

⇒ What does quality mean?

- **It defines the degree of convergence between expectation to/ requirement of a product and its actual characteristics**
  - Product quality
  - Process quality
  - Consumers (retailers) oriented quality

# The quality of herbs is defined by

- Colour (appearance)
- Amount of essential oils/aroma (smell, taste, nutritional value)
- Nutritional value (vitamins etc.)
- Secondary plant components (nutritional value)
- Structure (appearance)
  - It is not avoidable** to influence the parameters negatively during the dehydration process due to oxidation and evaporation, but changes can be reduced to a minimum  
⇒ drying **cannot** improve the quality of the raw material!
- Microbial infestation (mould, yeasts, bacterial pathogens)
  - ⇒ **cannot** be decreased by drying, but growing can be inhibited

# Phases of herb drying


- Phase I (only for rain-wet raw material)
  - Evaporation on the surface
  - Constant drying rate
  
- Phase II
  - Evaporation from interior of products and diffusion through already dried layers
  - Increasing temperature inside the product
  - Declining drying rate
  
- Phase III
  - Further evaporation of physicochemical bound water until moisture equilibrium is reached

- ⇒ The dehydration process for herbs should be as short as possible
- **Long drying times decrease product quality** due to chemical and physical changes
  - Achievable through **product oriented drying processes** and **control** of drying parameters
  - **Avoidance of over drying**
    - and therefore loss of valuable compounds, colour etc.
    - Drying process should be stopped when the final moisture content is reached, **not** after a certain time!
  - **High energy saving potential** ⇒ **reduction of processing costs**

optimum drying



vs.



non-optimum drying

Images: Cuervo-Andrade, 2011

# Aims in herb drying

The drying process aims to dry the product surface as quick as possible

to avoid:

- **Microbial growth** (which needs moist and temperature +/- 37°C)
- **Degradation processes** of color and valuable components due to oxidation

The air velocity needs to be sufficient (at least 0.12 m/s) to achieve a sufficient relative air mass flow

- **Too high** -> unsaturated air, inefficient
- **Too low** -> saturated air, moisture remains on the product surface, inefficient, longer drying times
- **Risk of moisture accumulation** due to unequal drying

Especially in low temperature drying the air velocity is the most important drying parameter!

# Influencing factors on quality

## ➤ Pre drying

### **Initial moisture content**

- Conditions during harvesting

### **Time between harvest and processing**

- Degradation during storage through self-heating, enzymes, etc.

### **Microbial infestation**

## ➤ During drying

### **Air temperature**

- Significant impact on product temperature  
Losses of valuable components

### **Relative humidity inside the dryer**

**Air flow** (risk of recirculation ⇨ pathogen accumulation)




### **Bulk (weight/height)**

- Quality losses during drying **cannot** be compensated in further processing steps!
  - The **whole processing chain** needs to be excellent!
- The drying process (duration, process parameters) depends on the raw material
  - Each drying process is individual and should be controlled dependent on the raw material quality and loading capacity




- Targeted short drying times risk the application of too high drying temperatures
  - Porous surfaces and cell damages of the final product, degradation processes

**Quality losses!!**



Images: Cuervo-Andrade, 2011

°C

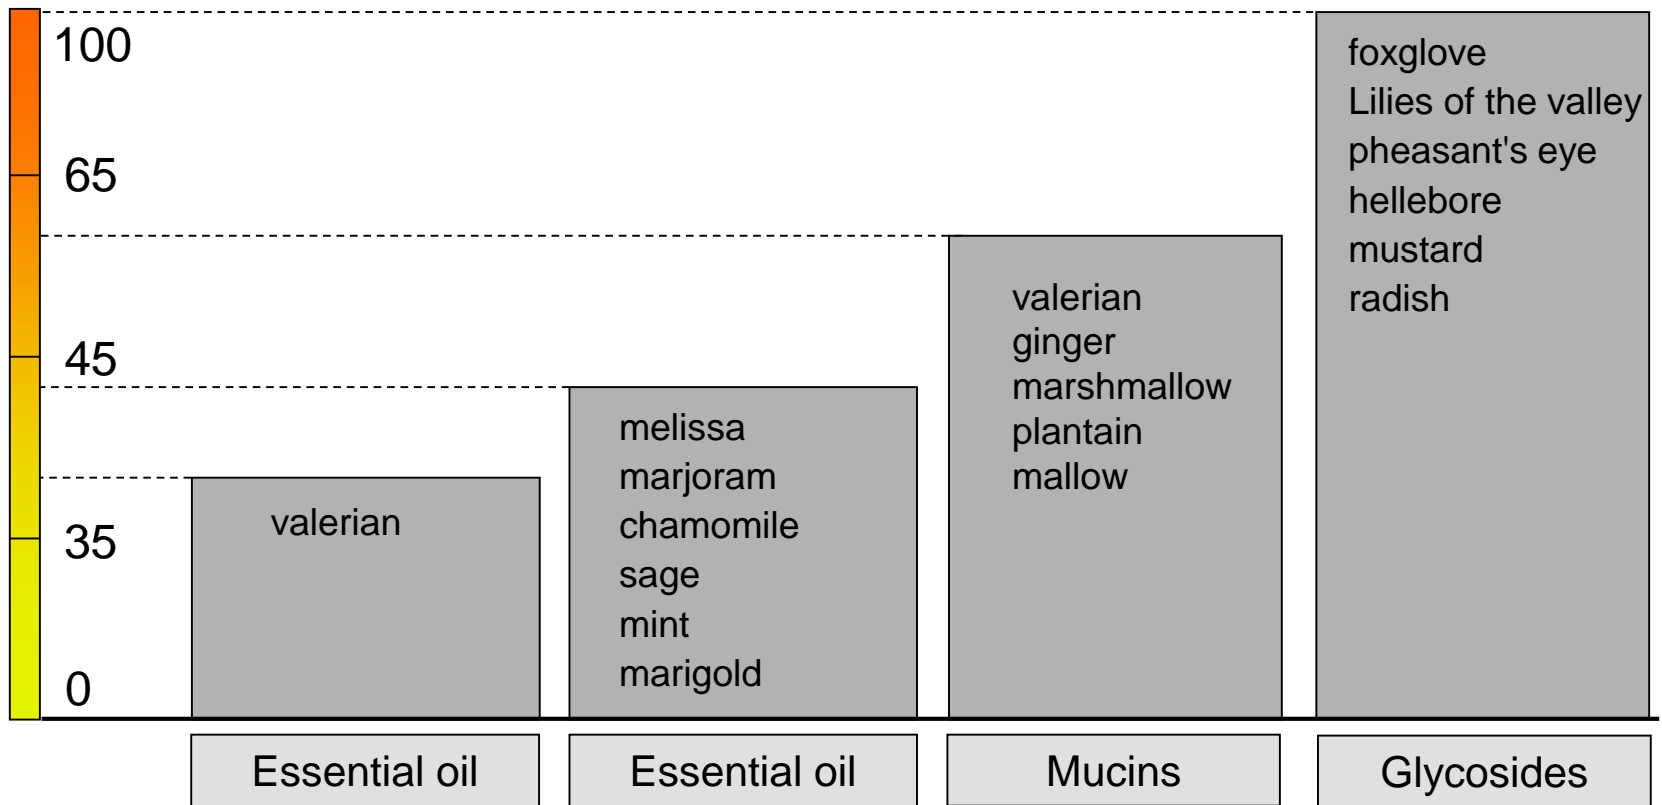


Main components

Cuervo-Andrade, n.d.

- Bulk: **bulk weight** is a more appropriate indicator than bulk height, as the bulk height neglects
  - The initial moisture content of the raw product
  - The particle size (volume)

## **Changes in air distribution throughout the bulk!**

- Air distribution
  - Unequal air distribution results in unequal drying of the bulk
  - Can be improved by small changes of the dryer construction
  - Can be improved by implementation of appropriate fans

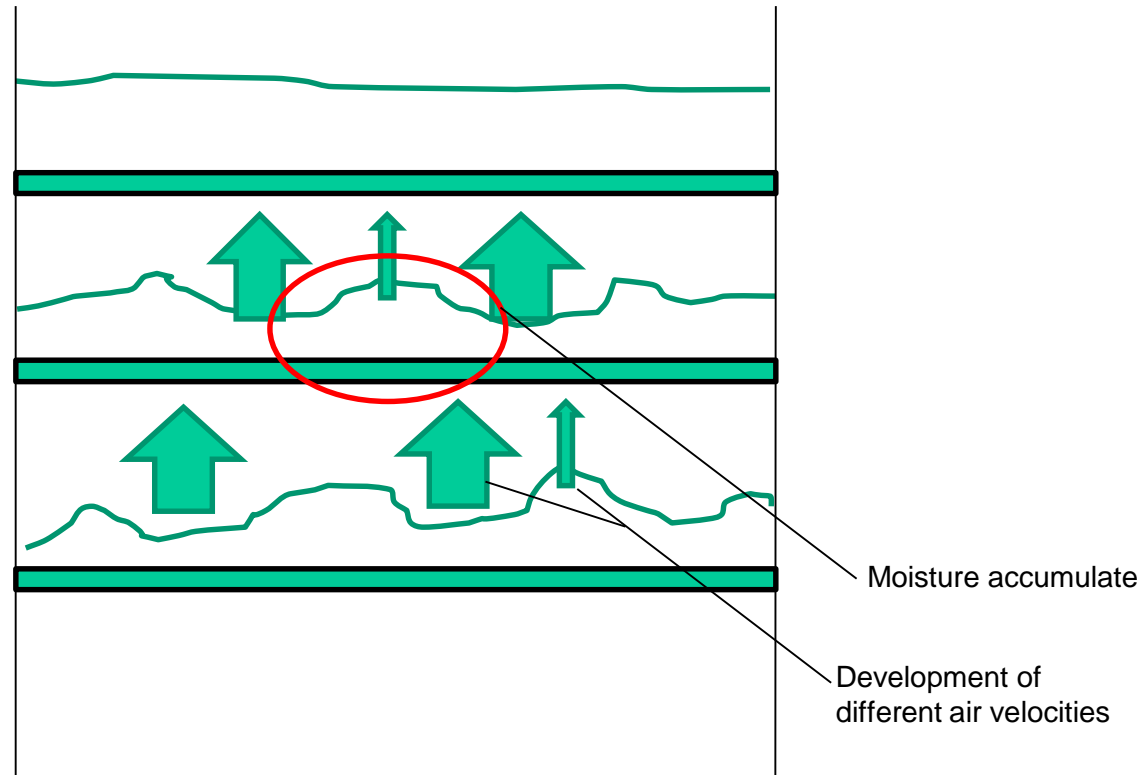

Air always goes the path of least resistance, which leads to moisture accumulation ⇒ non-uniform air distribution


# Keyword: Moisture accumulates

Non-uniform air distribution is produced by

- Too high bulks
  - ⇒ **Solution: The lower the bulk, the lower the compaction (related to volume reduction), the less air ducts ⇒ the better the air flow**
- increasing air velocities as the air resistance decreases during drying
  - ⇒ **The air velocity needs to be adapted during the process**


**A continuous through flow of the drying air has to be enabled during the whole drying process!**

# Effect on bulk height on air velocity and distribution

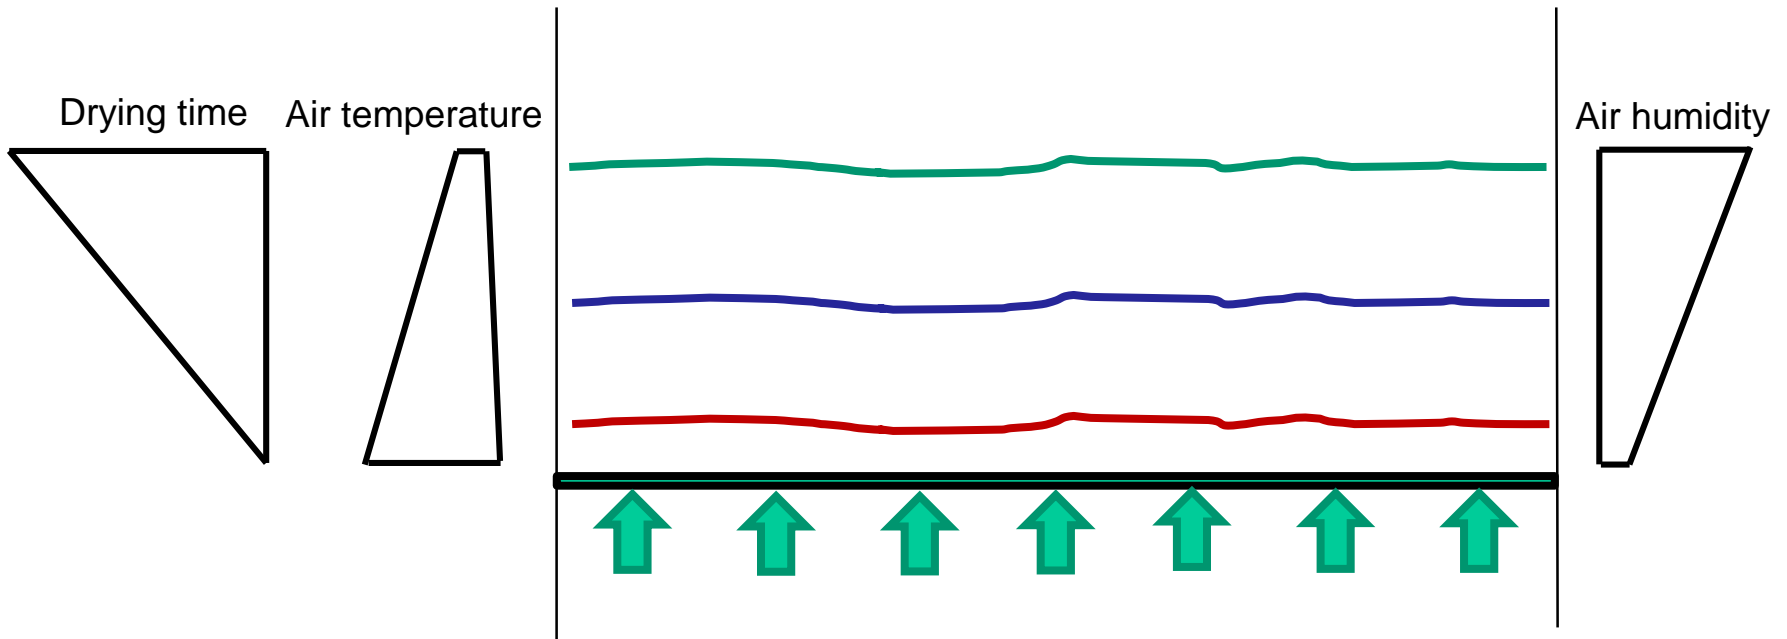

The higher the bulk, the more the velocity decreases throughout the bulk, the more uneven the distribution!

# Valuable parts of the plant

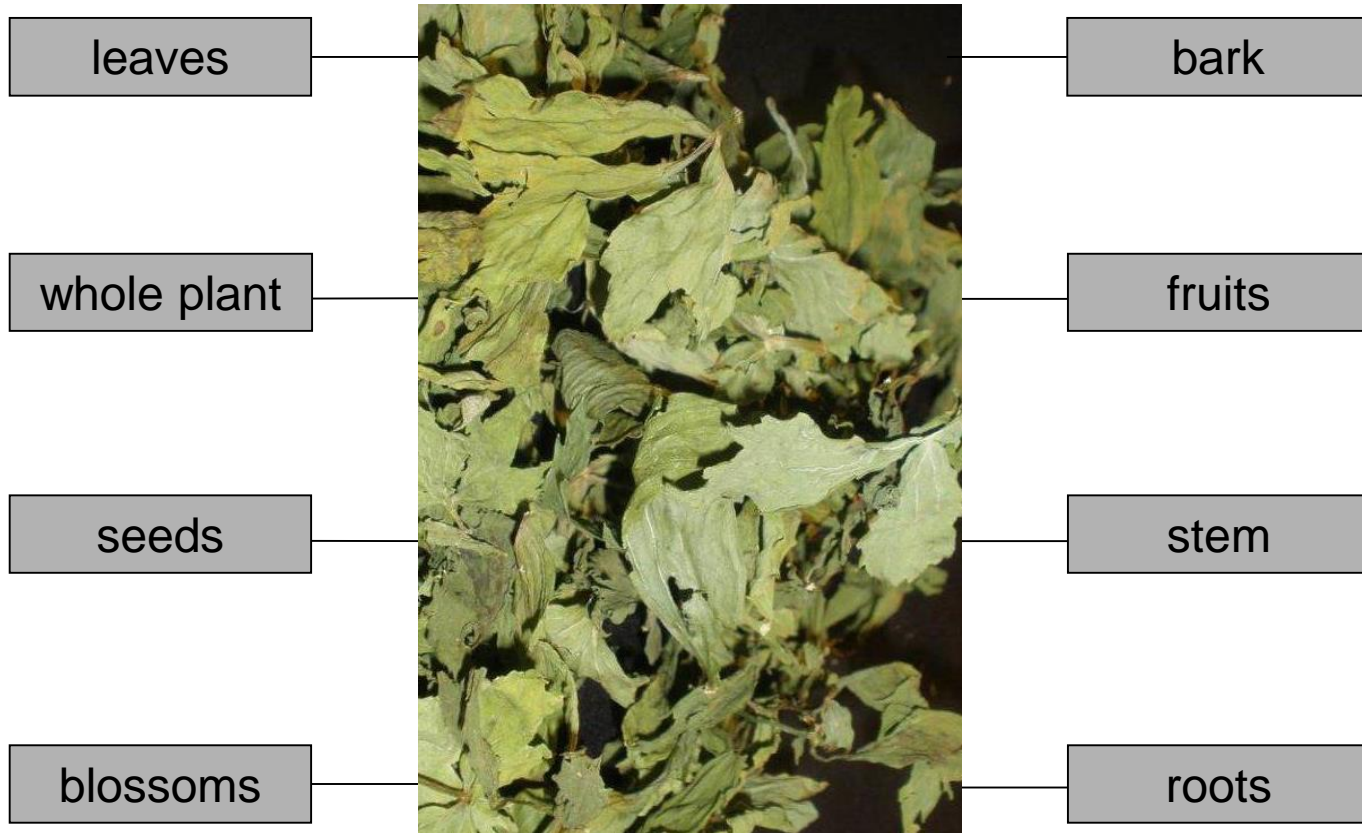

Risk for drying of whole plants: Overdrying or inadequate drying of different parts (indifferent drying behaviour)

# Energy consumption in herb drying

- Energy consumption of ca. 2000 kJ/kg dried herbs is possible!

However:

- Measured consumption on farm:
  - 8500 kJ/kg (Tray dryer)
  - 5000-6000 kJ/kg (belt dryer)
  - Worst measurement **20000 kJ/kg!!**



# Improvements in herb drying

- Product specific drying
    - Whole plant/parts
    - Knowledge of valuable components
    - Adapted bulk weights
  - Control of air velocity
    - Moisture removal  $\Rightarrow$  rel. air humidity  $\leq 70\%$  above the bulk
    - Equal air distribution, availability of enough air
  - Product temperature controlled drying

**Phase drying:** higher temperatures in the beginning until the surface is dry, further drying at quality saving temperatures

    - Quality parameters have to be defined
    - Critical temperature has to be known
- $\Rightarrow$  **decreased drying times, high product quality**


# Comparison of air temperature ( $T_A$ ) and product temperature ( $T_P$ ) controlled drying

Air Temperature

Product Temperature

Source: Krischer & Kast, 1978

# Temperatures as Functions of Moisture Content

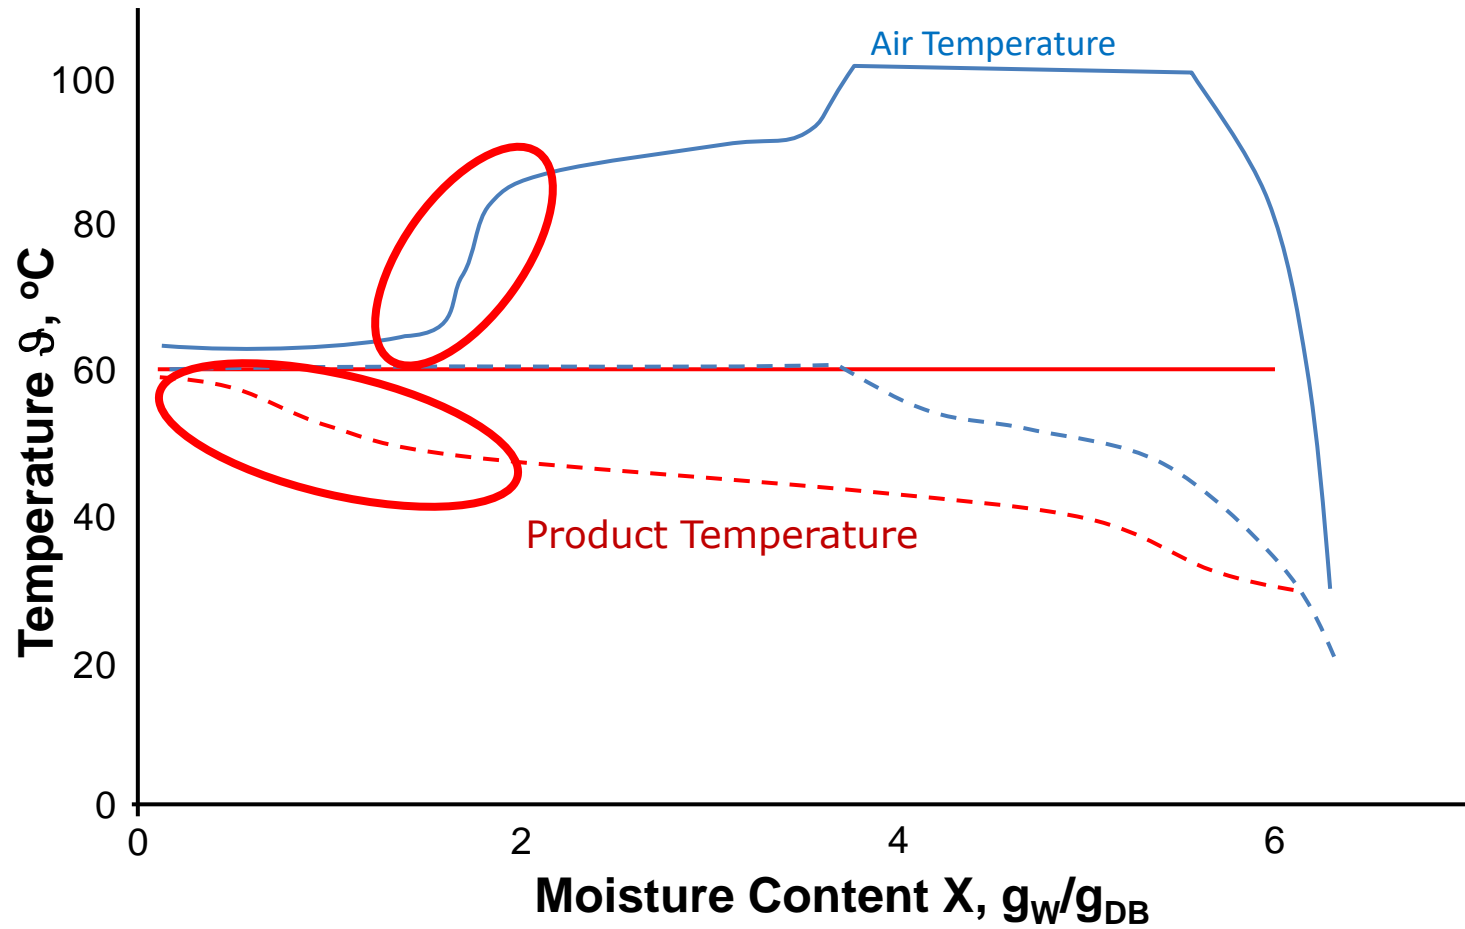

Sturm, ?

# Cost effective devices for product surface temperature measurement

## ➤ **Pyrometer**

## ➤ **Infrared (IR) camera**

- Data can feed back into the system

## **Product Temperature controlled drying**

Further

## ➤ **Drying strategies based on colour**

- CCD sensor applications (RGB cameras etc.)

## ➤ **Drying strategies based on spectral information**

- photospectrometer, hyper spectral imaging etc.

**Herb drying aims to achieve high product qualities and low energy consumptions**

therefore

- **The process duration of herb drying should be as short as possible**
- **Processing parameters are related to every individual product**
- **Drying parameters are not fixed and their control is related to the changes of the product during drying**

- Chua, K. J.; Chou S. K.; Ho, J. C.; Mujumdar, A. S. & Hawlad, M. N., 2000. Cyclic Air Temperature during drying of guave pieces: Effects on moisture and ascorbic acid contents. *Food and Bioproducts Processing* 78 (2): 28-72.
- Cuervo-Andrade, S.P., 2011, *Quality oriented drying of lemon balm (Melissa officinalis L.)*. Doctoral Dissertation, University of Kassel, Germany.
- Cuervo-Andrade, S.P., n.d. Qualitätsorientierte Solartrocknung von Arznei- und Gewürzpflanzen. Oral presentation.
- Krischer, O. & Kast, W., 1978. Die wissenschaftlichen Grundlagen der Trocknungstechnik, Bd. 1. 3. Auflage, Springer Verlag, Berlin, Heidelberg.
- Martynenko, A., 2008. Computer Vision System for Ginseng Drying: Remote Sensing, Control and Optimization of Quality in Food Thermal Processing. VDM Verlag, Saarbrücken
- Mujumdar, A. S., 2007. Handbook of Industrial Drying. CRC Press, Boca Raton, New York, Oxon
- Further reading: Ziegler, A., 2017. Leitfaden Trocknung von Arznei- und Gewürzpflanzen. Bornimer Agrartechnische Berichte. <https://opus4.kobv.de/opus4-slbp/frontdoor/index/index/docId/12293>

- 1. What is the minimum air velocity required for herb drying?**
- 2. What causes quality losses in dried herbs  
pre drying?  
during drying?**
- 3. How much energy should be consumed on average (kJ/kg dried herbs)?**
- 4. What is the most important drying parameter for low temperature drying?**